

# OUT OF SIGHT, OUT OF MIND. OUT OF THE BASEMENT, OUT OF THE YARD.

IN-WELL INSTALLATION KEEPS YOUR YARD AND BASEMENT CLUTTER FREE

STAINLESS

PVC



In the well installation saves space and eliminates freezing problems associated with homes built on a slab.

Corrosion proof Stainless Steel or PVC outer shell maximizes life span and minimizes maintenance.

Designed to fit into 4", 5" or 6" wells.

Can be used in residential, farm, light commercial and industrial applications.

Threaded 1 1/4 FNPT system connectors make installation a piece of cake.

Flexcon's new IN-WELL tanks are the perfect way to eliminate the presence of well tanks from both indoor and outdoor spaces.

Because this new type of tank is installed directly in the well pipe, space, noise, condensation and freezing issues associated with regular well tanks are a thing of the past.

Our IN-WELL tanks are designed to be used with a variable speed pump or regulating valve constant pressure system. Combined with Flexcon quality, reliability and expertise, they're guaranteed to provide your customers years of trouble free service.

Additionally, due to their simple design, installation is a piece of cake.



The Reliable Source®

# IN-WELL BY FLEXCON

## MATERIALS OF CONSTRUCTION

- **Outer shell:** 5 gauge stainless steel / schedule 40 PVC
- **Water chambers:** Heavy-Duty 100% butyl rubber bladder
- **Testing:** High pressure, seam weld, helium, final precharge check
- **Air valve:** Brass valve with o-ring seal
- **Warranty:** Five year





## DIMENSIONS & CAPACITIES

Flexcon Model	Former In-Well Model	Outer Shell Material	Total Volume (Gallons)	Max. Working Pressure/ Temperature	Dimensions		Shipping Weight	Load Capacity
					Dia	Length		
IWSS 4	NT-30SS	SS	3.5 Gal	124 psi/100F	3 5/8"	102"	32 lbs	7500 lbs
IWSS 5	NT-50SS	SS	4 Gal	125 psi/100F	4 1/2"	60"	34 lbs	7500 lbs
IWPL 4	PL-35	PVC	3.5 Gal	100 psi/74F	3 1/2"	116"	26 lbs	2000 lbs
IWPL 5	PL-45	PVC	4.25 Gal	100 psi/74F	4 1/2"	82"	26 lbs	2000 lbs

Tank pre-charge on IWSS models is 38 psig and 20psig on IWPL models. All tanks have a 1-1/4" FNPT connection.

## TYPICAL INSTALLATIONS

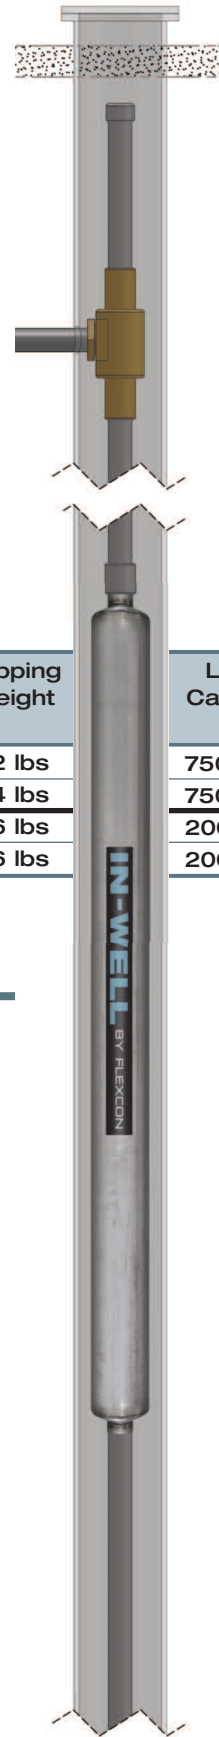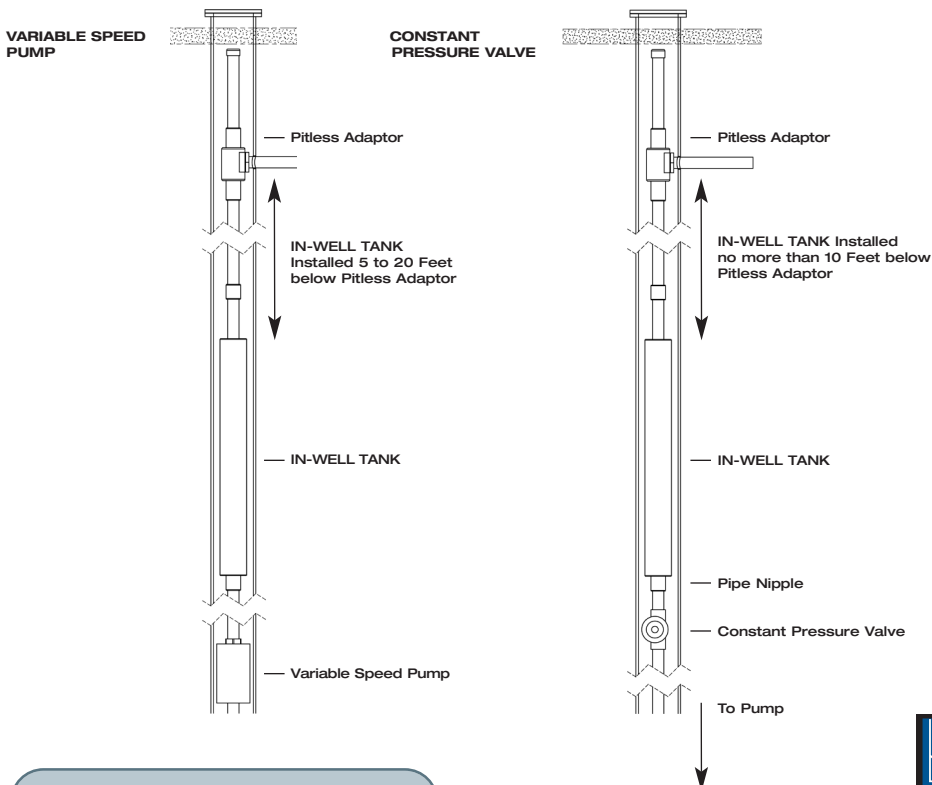

> [www.flexconind.com](http://www.flexconind.com)  
 > 781-986-2424  
 > 300 Pond Street  
 > Randolph, MA 02368



The Reliable Source®